

Vi3105

MaxiiNet™ 5-port 60W PoE Powered PoE Switch w/ Extended UTP Uplink

Features

- 5-port fixed managed layer 2 PoE switch with extended distance UTP uplink
- Can be powered from a remote PoE source to provide PoE power to the switch and all 4 ports
- Up to 37W PoE per port, capable of combining 2 ports for up to 74W
- Transmits up to four cameras on a single UTP
- Input UPoE compliant to 74 watts
- The switch itself can be powered from a remote PoE source for up to 3,000 ft. when output PoE is not required
- Intelligent power sensing automatically allocates port power based on the number of connected ports and individual camera power requirements
- Automatic PoE port priority allocation
- Over current shut down protection if allocated PoE budget is exceeded
- Type tested to RFC 2544 TCP/IP network bandwidth packet transmission standards
- Hardened tested for -20°C to +70°C operating temperature range
- Complies with major IEEE standards and RFC network protocols for UTP, TCP/IP, HTTP/HTTPS
- Provides full Layer 2 network switch functionality



Applications

- Upgrading analog CCTV installations into digital systems
- Expanding networks in industrial environment
- CCTV system for casinos, airports, school campuses, and many more

Vigtron's MaxiiNet™ Vi3105 fixed managed 5-port PoE switch brings new performance standards to the growing need for high speed transmission of high speed Ethernet.

The Vi3105 can be powered by PoE sources up to 74W, UPoE compliant, over extended UTP uplink or locally by the Vi1120 120W power supply to provide up to 37W to each port or up to 74W from two combined ports.

With an operating temperature range of -20°C to 70°C, the Vi3105 is the perfect solution for data and power transmission for applications such as warehouses, parking lots, campuses, casinos. The Vi3105 is MegaPixel Certified (MPC™), type tested to network packet performance standards to assure you an error free and quality operation. Fixed managed L2 functions includes 802.1p QoS, support of 2k MAC addressing, learning, aging, and a non-blocking switch fabric.

Installation cost savings, proven performance, and major camera manufacturer compatibility all go into making Vigtron's MaxiiNet™ Vi3105 an ideal solution for IP video and PoE transmission.



Technical Specification*

Electrical

| | |
|--------------------|---|
| Ethernet Interface | Standard 10/100BaseT |
| UTP | 100 Ohm +/- 20%, up to 3,000 ft. (914m) |
| Power Source | PoE: 802.3af (15.4W), 802.3at (30W), 74W UPoE compliant External Power Supply: 57VDC @ up to 120W or 12VDC @ 0.3A for non-PoE operation |
| Status LEDs | Power: Power On Ethernet: Traffic, Link PoE: PoE Present |
| Connectors | Ethernet Interface: 5 x RJ45 Power: Circular power connector |
| RFC | 2544 TCP/IP Packet Transmission |
| RFC | 768 UDP, 2068 HTTP, 793 TCP 791 IP, 1783 TFTP, 894 IP over Ethernet |
| PoE Compatibility | IEEE 802.3af, IEEE 802.3at, 60W High power PoE++ |

Ordering Information

| Part No. | Description |
|----------|---|
| Vi3105 | 5-Port Layer 2, 60W PoE Switch |
| Vi1120 | 120W, 57VDC Power Supply |
| Vi0017 | 40W 48VDC Power Supply |
| Vi0012 | 12W 12VDC Power Supply for non-PoE Applications |
| Vi0015 | Combiner Cable for 74W PoE |
| Vi2301A | 1-Port UTP Ethernet Extender |
| Vi2304A | 4-Port UTP Ethernet Extender |
| Vi2308A | 8-Port UTP Ethernet Extender |
| Vi2316A | 16-Port UTP Ethernet Extender |
| Vi2508 | 8-Port UTP Ethernet Extender & PoE Midspan |
| Vi2516 | 16-Port UTP Ethernet Extender & PoE Midspan |

Regulatory

| | |
|---------------|--|
| Safety | CE |
| Environmental | RoHS, WEEE |
| FCC | Part 15, Subpart B, Class B 2010 |
| Emissions | EN5502:2006+A1:2007 EN 61000-3-2:2006+A1:2009+A2:2009 EN 55024: 1998+A1:2001+A2:2003 |

Environmental

| | |
|-------------|--|
| Humidity | 0 to 95%, non-condensing |
| Temperature | Operating: -20°C to +70°C Storage: -40°C to +85°C |


Mechanical

| | |
|------------|--|
| Dimensions | 1.2x3.75x4.97 in., 3.0x9.5x12.6 cm (HxWxL) |
| Weight | 0.64 lb (290 g) |
| Housing | Aluminum |

Optional Accessories


- Vi1120: 57VDC, 120W Power Supply
- Vi0017: 48VDC, 40W Power Supply
- Vi0012: 12VDC, 12W Power Supply for non-PoE Applications
- Vi0015: Combiner Cable for 74W Operation

*Specifications subject to change without notice.

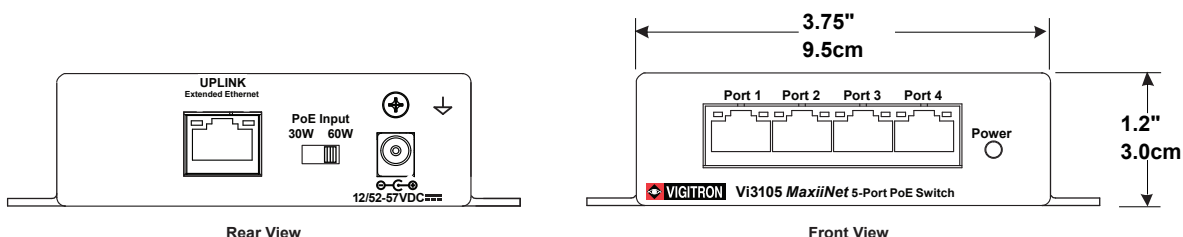


TEL (+1) 858-484-5209 • FAX (+1) 858-484-1205
7810 Trade Street, Suite 100, San Diego, CA 92121, USA • support@vigatron.com • www.vigatron.com

Application Diagrams

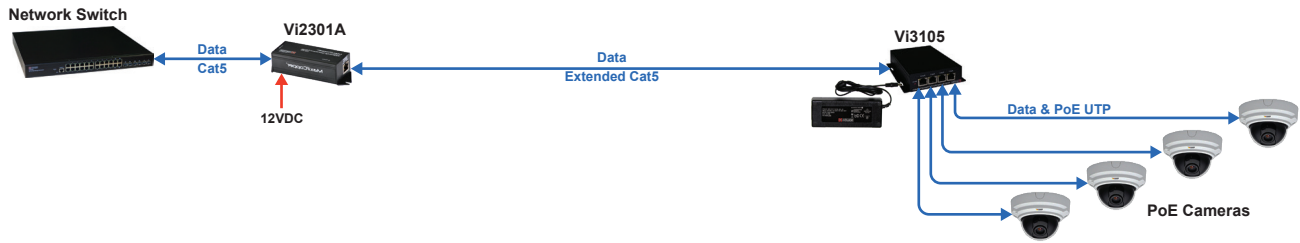

The Vi3105 can receive data over extended distance UTP up to 2,000 ft. at 100Mbps and power 4 PoE cameras using local power supplies.

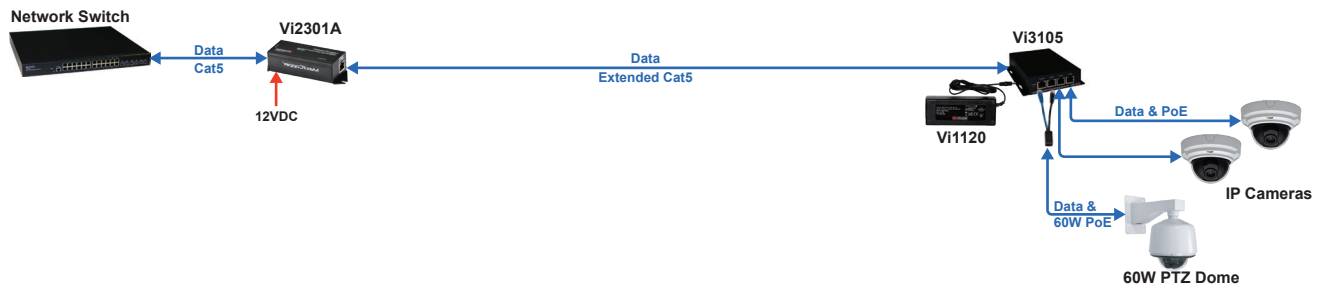

The Vi3105 can receive data over extended distance UTP up to 2,000 ft. at 100Mbps and power 60W PoE cameras using the Vi0015 combiner cable and a local power supply.



The Vi3105 can receive data and 60W PoE power over extended distance UTP up to 2,000 ft. at 100Mbps and power up to 4 cameras.